


Seam-2520

Features

- Small size
- High Precision
- Ceramic Package
- Dribbling Packing

Application


- Audio Visual Equipment
- Bluetooth
- Internet
- Industrial Control

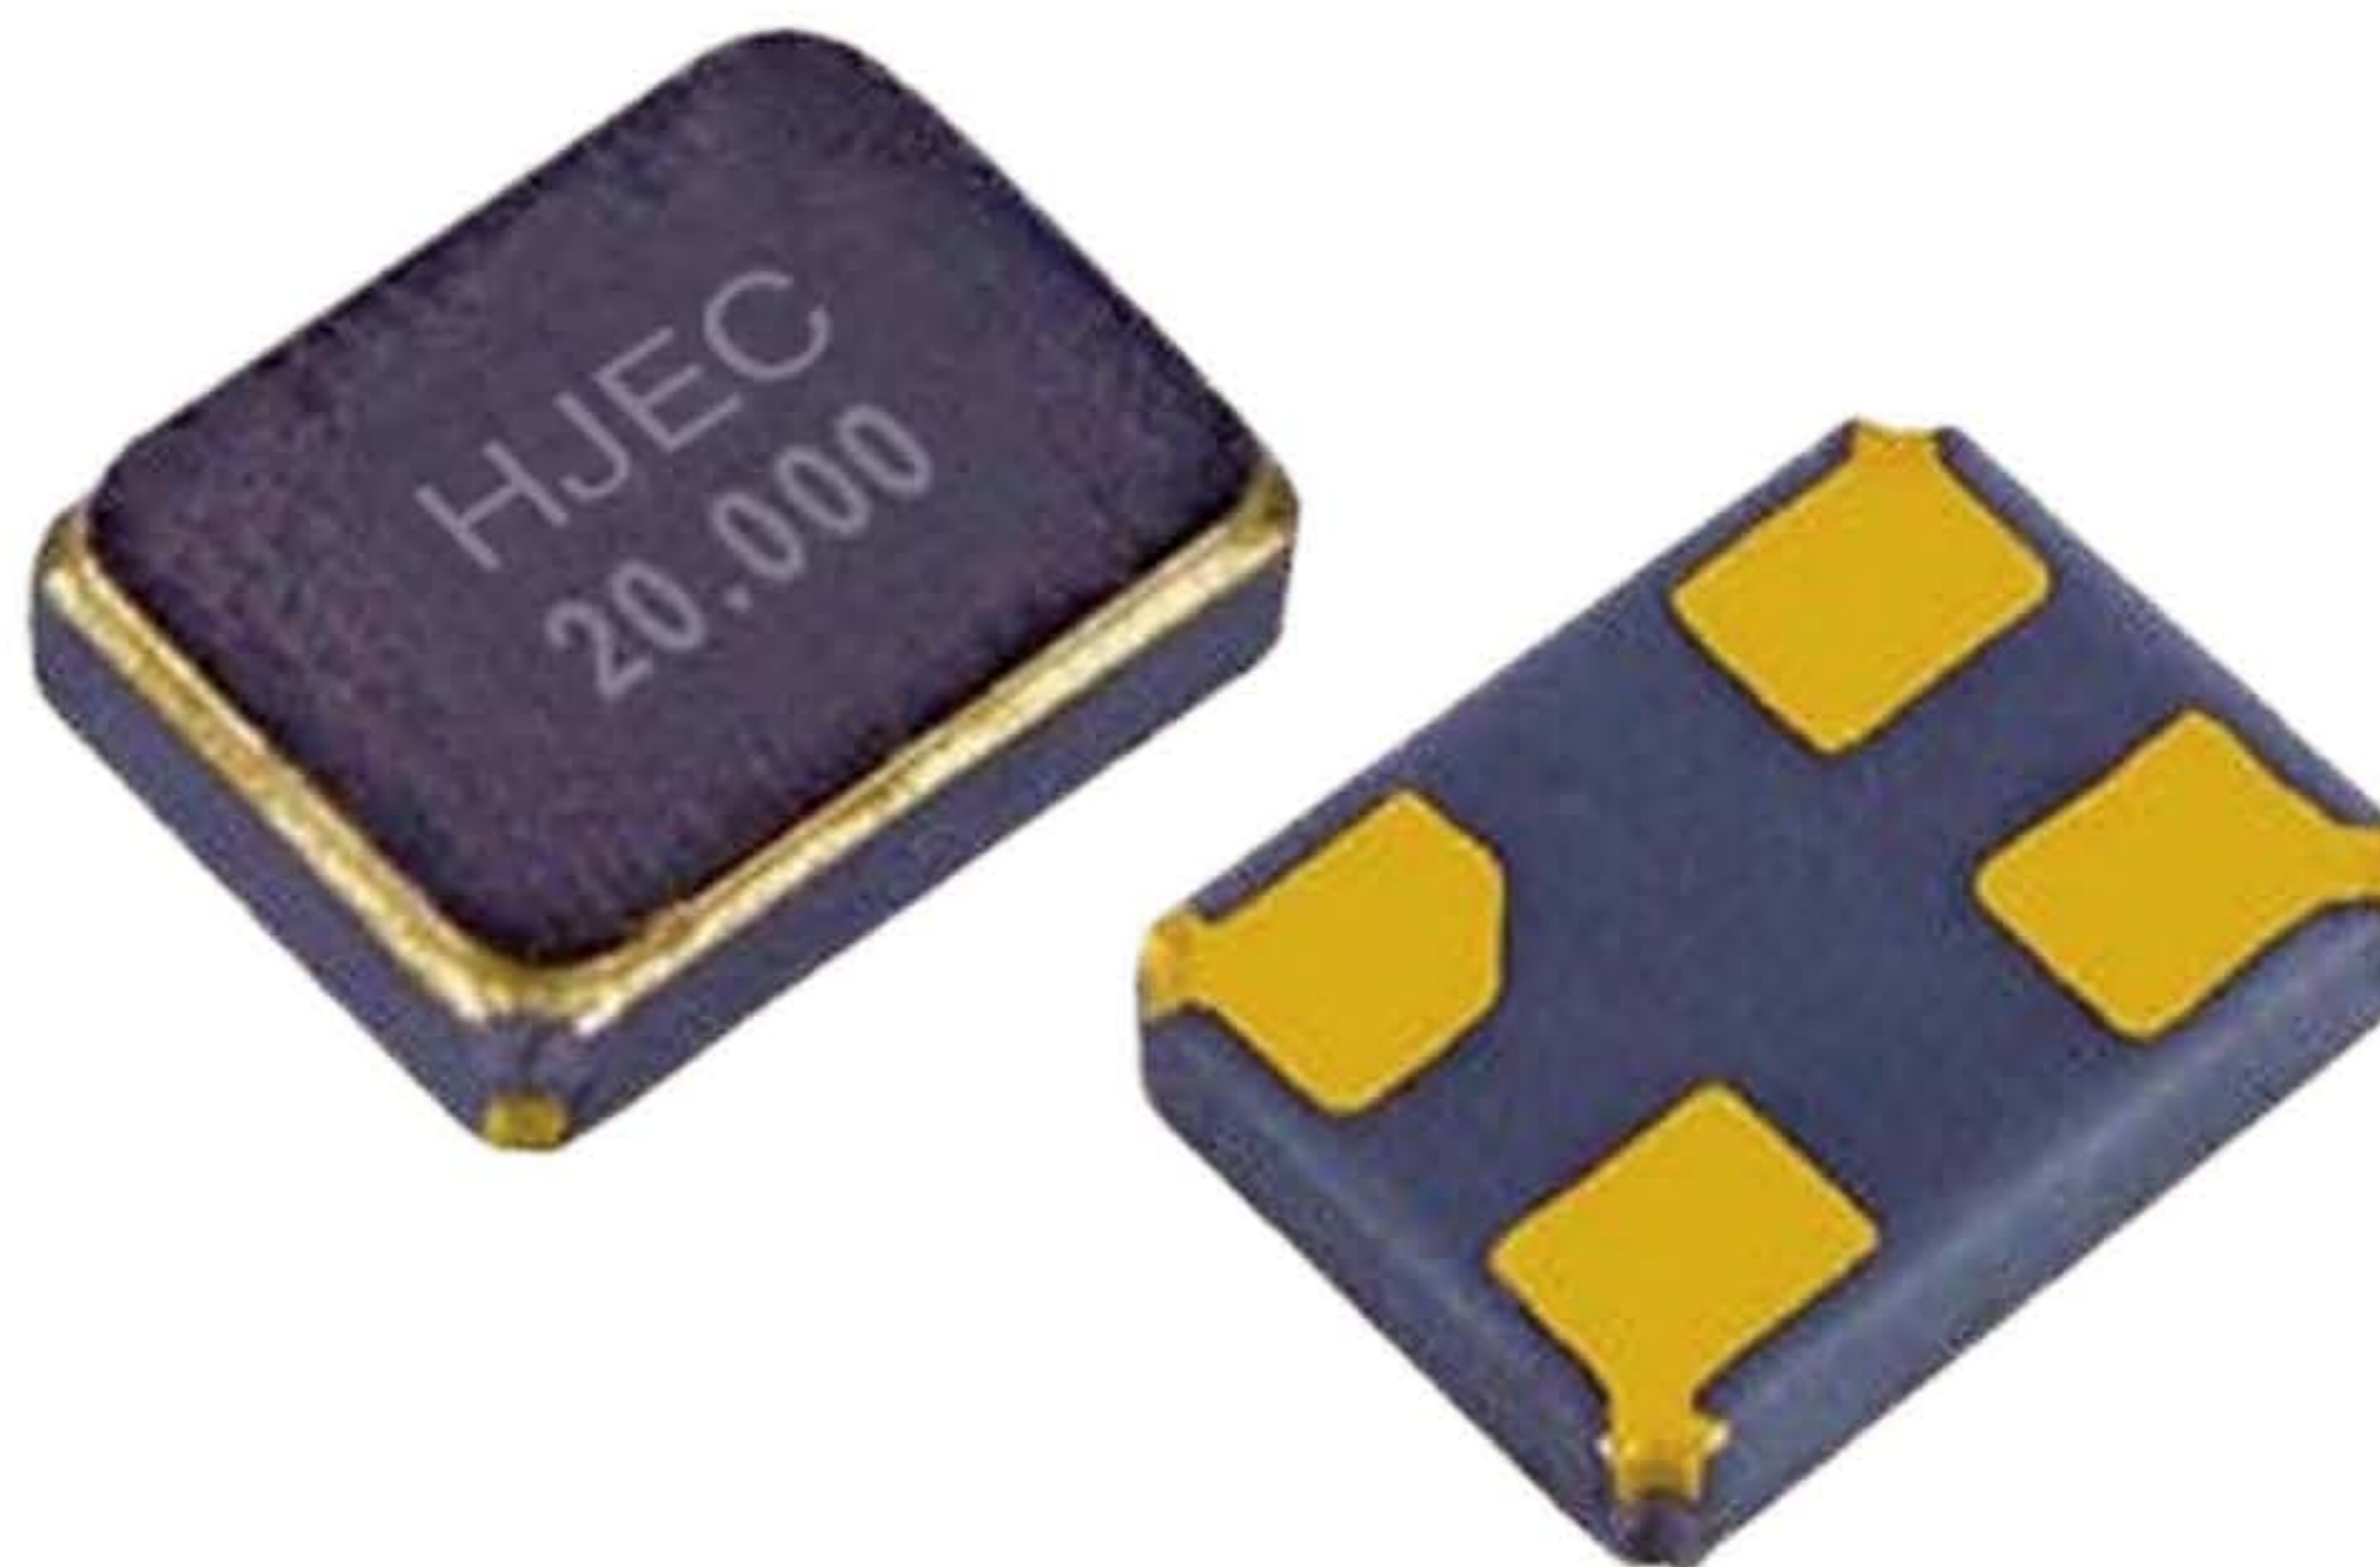

Electrical Specification

Model	Seam-2520
Frequency Range(MHz)	12.000~54.000
Vibration Mode	AT Fundamental
Frequency Tolerance(25°C)	$\pm 5 \times 10^{-6} \sim \pm 30 \times 10^{-6}$
Storage Temperature	-55°C~+125°C
Static Capacity	7pF Max.
Load Capactiance	6pF~30pF or Cascade
Insulation Resistance	>500MΩ DC/100V $\pm 10V$
Driving Power	0.01mW~0.1mW
Frequency Aging	$\pm 3 \times 10^{-6}$ /Year Max.

Drawing

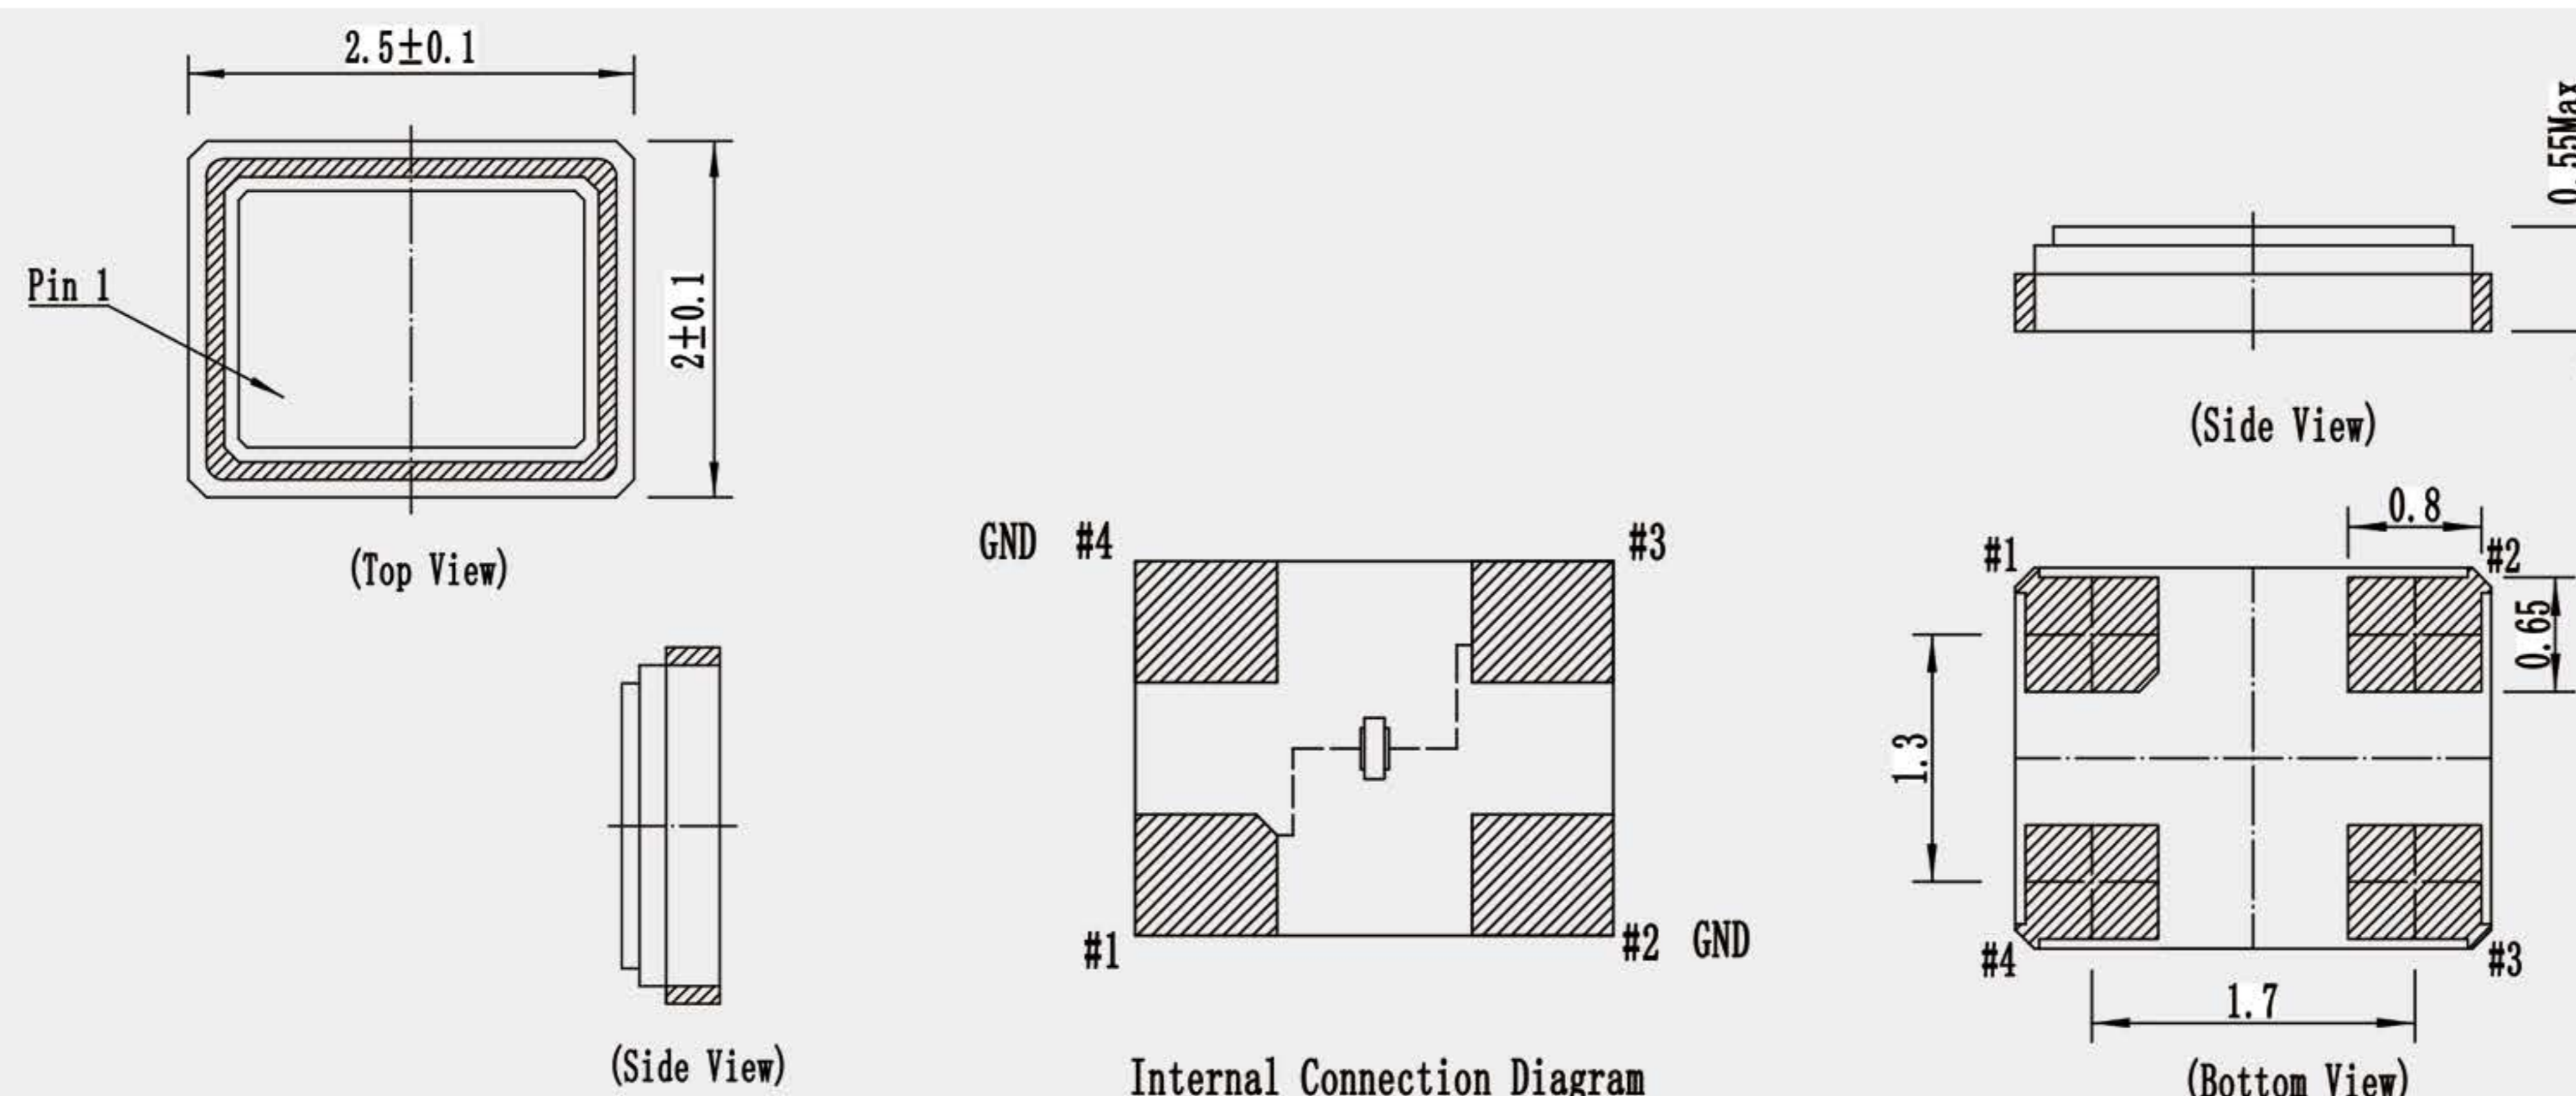

Pin	Function
#1	Input
#2	Ground
#3	Output
#4	Ground