


Features

- Small size
- High Precision
- Ceramic Package
- Dribbling Packing

Application

- Audio Visual Equipment
- Handheld Devices
- Internet

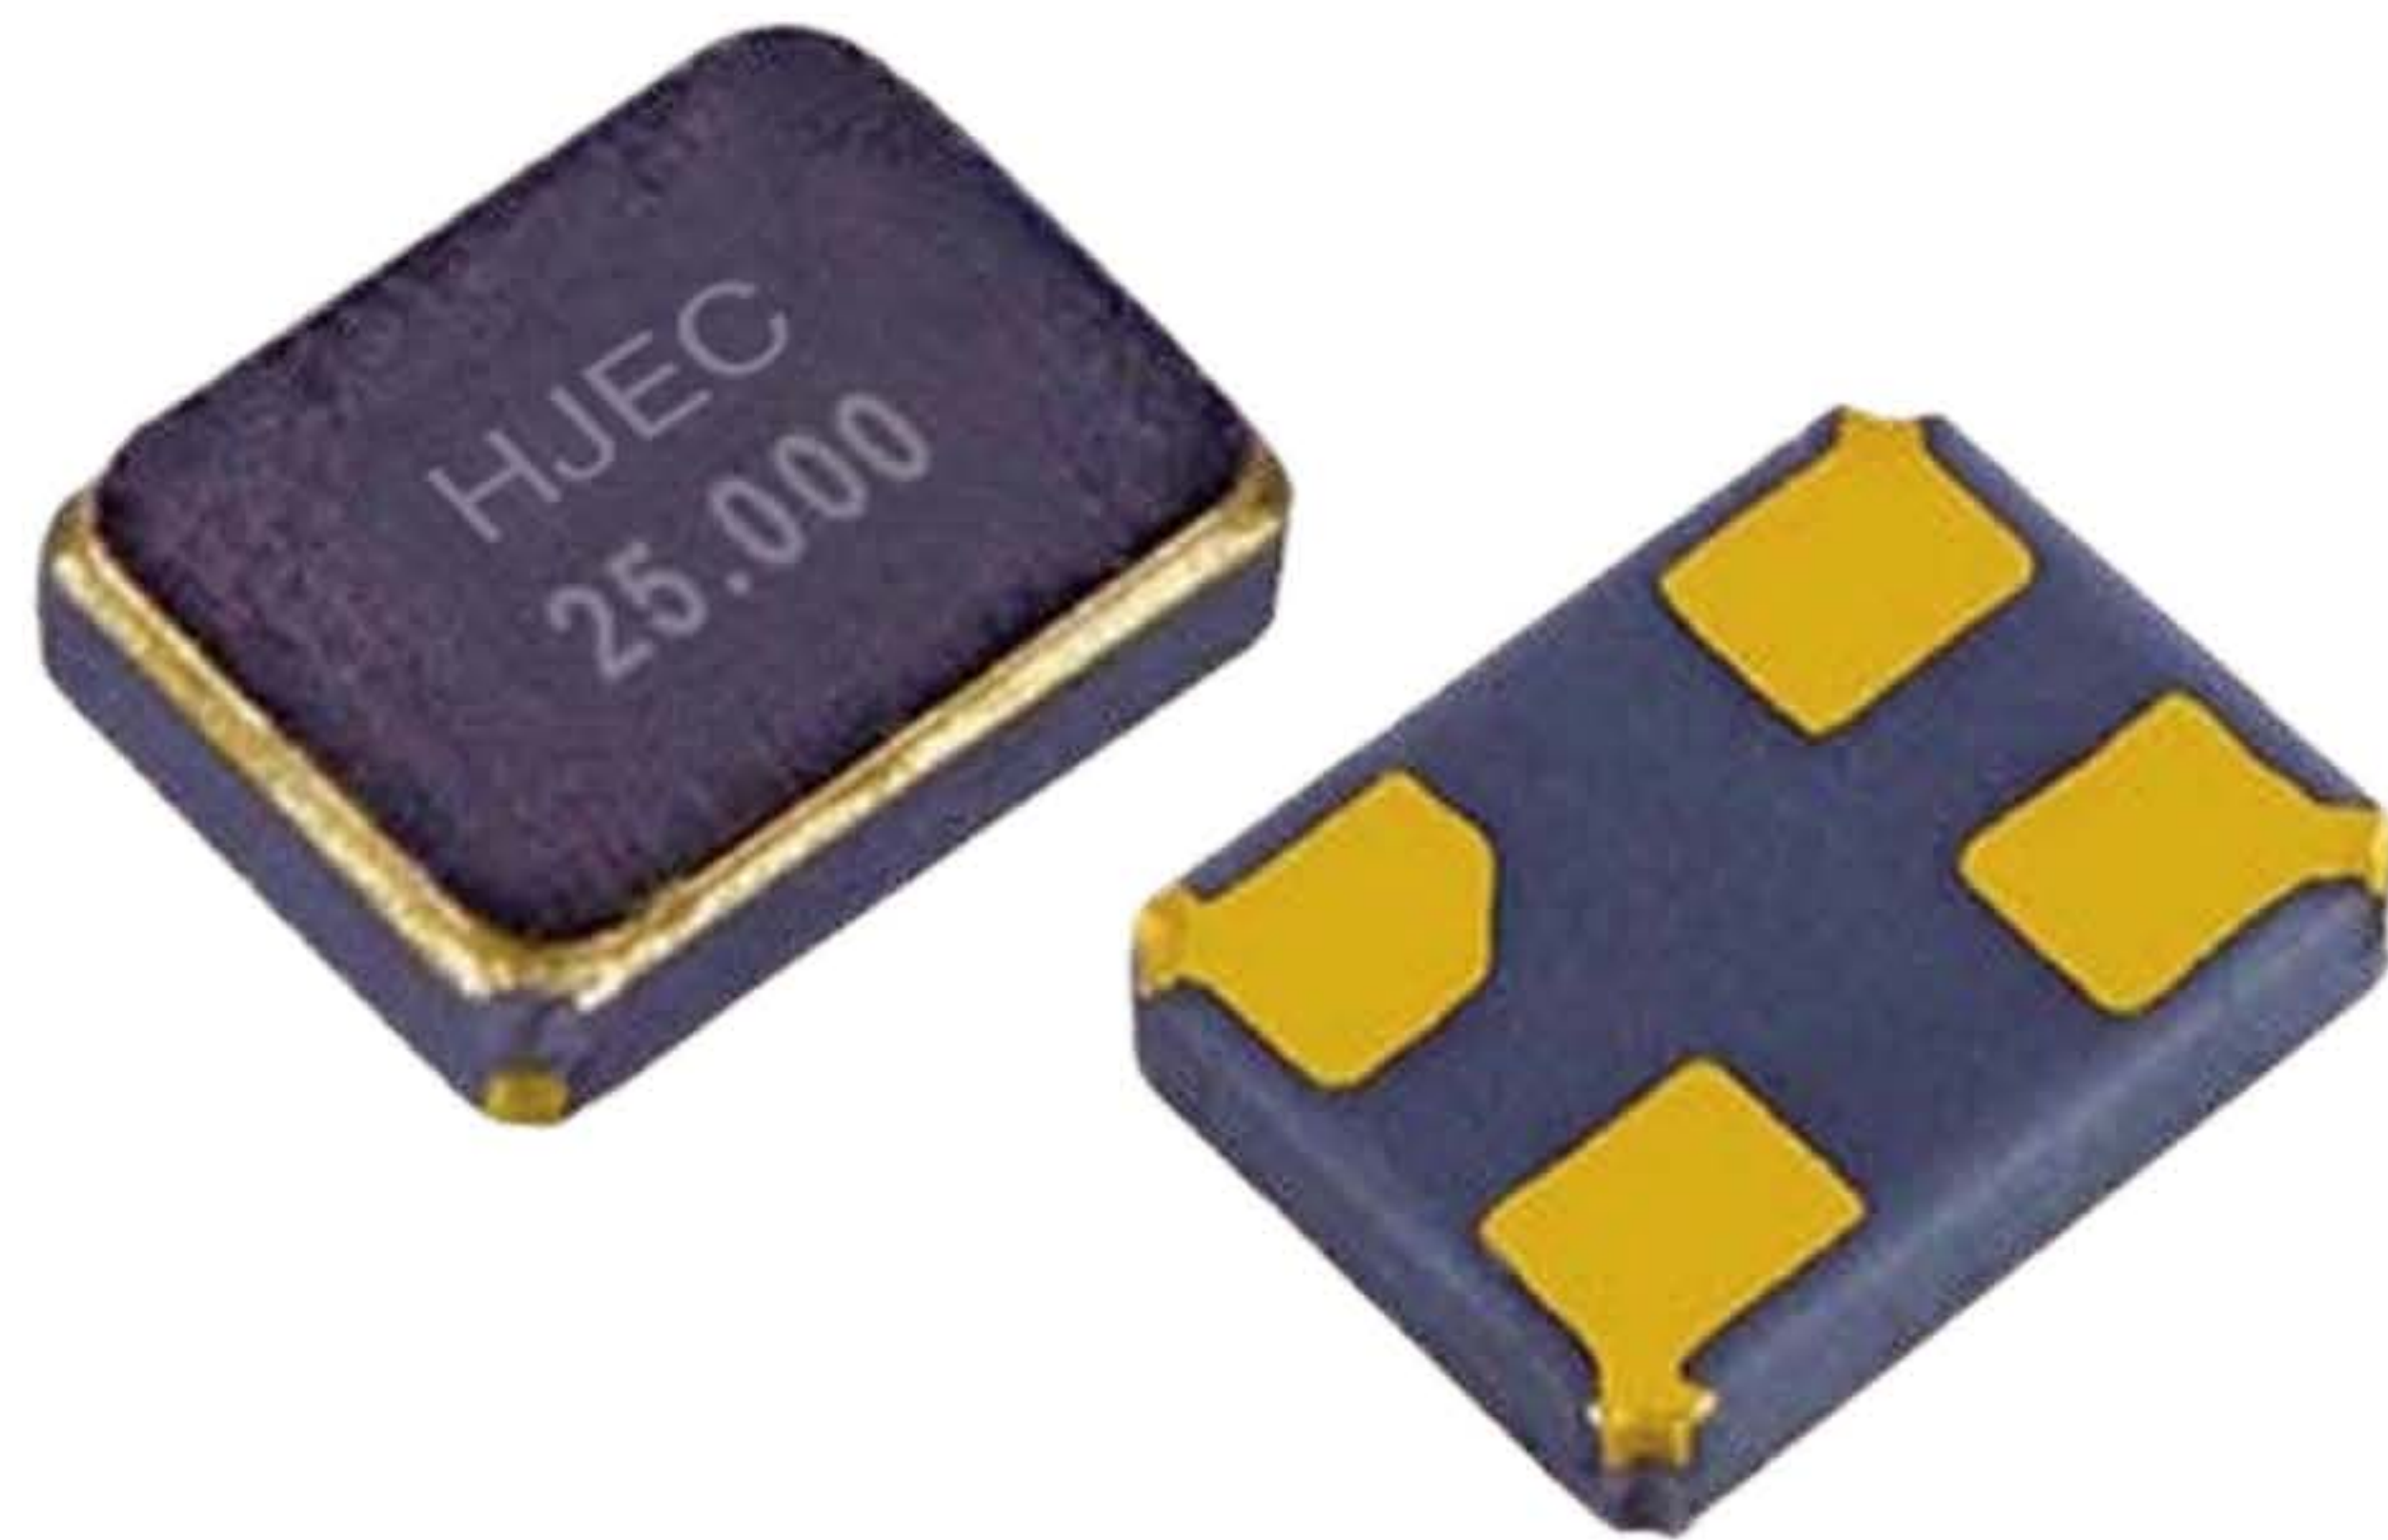

Electrical Specification

Model	Seam-2016
Frequency Range(MHz)	16.000~60.000
Vibration Mode	AT Fundamental
Frequency Tolerance(25°C)	$\pm 5 \times 10^{-6} \sim \pm 30 \times 10^{-6}$
Storage Temperature	-55°C~+125°C
Static Capacity	3pF Max.
Load Capacitance	6pF~30pF or Cascade
Insulation Resistance	>500MΩ DC/100V ± 10V
Driving Power	0.01mW~0.1mW
Frequency Aging	$\pm 3 \times 10^{-6}$ /Year Max.

Drawing

